


## Drain Valves

- 57 Quarter Turn Drain Valve**
- T-handle extends 2" from the panel for easy turning
  - Available in 0° or 90° handle position - Must specify
  - For hydrostatic pressures up to 500 psi
  - 3/4" NPT threads
  - Weight: 1 1/2 lbs.
- 4 Drainit Drain Valve**
- Small, compact drain valve
  - 3/4" NPT male thread
  - Opening equivalent to 3/8" diameter hole
  - Length: 2 1/4"
  - weight: 10 oz.
- 7 3/4" Drain Valve**
- Push-pull valve for draining discharge, suction, or in-line valves
  - For hydrostatic pressures up to 500 psi
  - Brass handle shaft and body
  - 3/4" NPT female inlet and outlet thread
  - Weight: 1 1/4 lbs.



Style 4

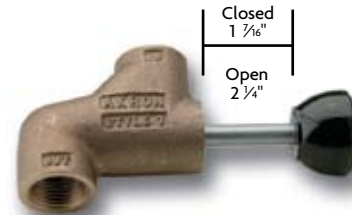


## Butterfly Valves

Available in 4", 4 1/2", 5", and 6" full flow sizes. Operates to 250 psi and meets NFPA 1901 Standard for opening and closing speed when used with Gear, Air or Electric Actuators. Manual quarter-turn handle is available for dump valve applications.

Optional Inlets & Outlets:

- Male
- Female NPT
- Female Swivel (Rocker lug or long handle)
- Victaulic
- Storz (Swivel standard on 4" & 5", 6" rigid only)

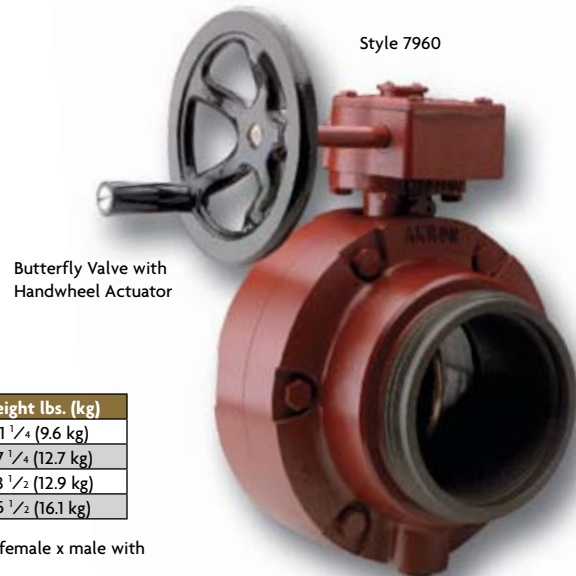

Style	Size	Length	Weight lbs. (kg)
7940	4" (101 mm)	9 1/2" (241 mm)	21 1/4 (9.6 kg)
7945	4 1/2" * (114 mm)	9 3/4" (248 mm)	27 1/4 (12.7 kg)
7950	5" (125 mm)	10" (254 mm)	28 1/2 (12.9 kg)
7960	6" (152 mm)	10" (254 mm)	35 1/2 (16.1 kg)

\* 5" (12.7 cm) Body Weights and lengths with rocker lug female x male with handwheel actuator

## Intake Pressure Relief Valve

- 59 Intake Pressure Relief Valve**
- For mounting on main pump intakes with a four bolt flange (4 3/8" or 4 19/32" bolt circle diameter). Adjustable from 50-175 psi. Factory set at 125 psi, available with a 2.5" NPT, 2.5" NH or 2.5" victaulic outlet. Weight: 14 3/8 lbs.

