

## Gated Siamese

Siamese with quarter-turn valves provide a positive shutoff and easier operation. All 2 1/2" swivel inlets are supplied with strainers.

### 1483 Suction Siamese

- Tork-Lok handles for positive handle positioning
- Used on pumper suction or aerial platform inlets

### 1583 Suction Siamese

Used on pumper suction or aerial platform inlets. Features Tork-Lok® handles for positive handle positioning.

- Drain valves optional

### 2583 3-Way Suction Siamese

Used on pumper suction or aerial platform inlets. Features Tork-Lok handles for more positive handle positioning.

- Drain valves optional



Style 1583



Style 2583



Style 1483

Style	Material	Length	Width	Weight lbs. (kg)	Inlet	Outlet
1483	Brass	9 1/8" (232 mm)	11 1/2" (292 mm)	35 3/4 * (16.2 kg)	(2) 2 1/2" F (65 mm)	2 1/2" - 6" F or M (65 - 150 mm)
1583	Pyrolite	9 1/4" (235 mm)	11 1/2" (292 mm)	16 * (7.3 kg)	(2) 2 1/2" F (65 mm)	2 1/2" - 6" F or M 4" or 5" Storz (65 - 150 or 100 or 125 mm)
2583	Pyrolite	11 3/4" (298 mm)	16" (298 mm)	26 1/2 * (12 kg)	(3) 2 1/2" F (65 mm)	2 1/2" - 6" F or M 4" or 5" Storz (65 - 150 or 100 or 127 mm)

\* Weight with 4 1/2" (114 mm) inlet

## Plain Siamese

### 261 Plain Siamese

Style	Material	Length	Width	Weight lbs. (kg)	Inlet	Outlet
261	Brass	6 1/2" (165 mm)	9" (228 mm)	8 1/4 (3.7 kg)	(2) 2 1/2" F (65 mm)	2 1/2" or 3" M (65 or 75 mm)



Style 261

## Valve Manifold

### 599 Valve Manifold


The Valve Manifold is designed for Fast, Efficient, High Flow water movement. The manifold is simply rolled into position and used with LDH hose to provide a portable above ground fire hydrant system. The Style 599 is your answer to moving & distributing large volumes of water at the next fire, emergency, or natural disaster.

- Flows up to 2000 gpm
- Operating Pressure up to 350 psi
- 6 total Discharge Valves
  - 2 1/2" or 3"

Each Valve includes:

- Twist Lock Handle
- Pressure Gauge
- Drain
- Cap with chain

- Female Swivel Inlet
- Adjustable Pressure Relief Valve
- Retractable Wheelbarrow type Handles
- Sturdy Welded Aluminum Frame
- 18" high x 22" wide x 33" long
- Pneumatic Tires

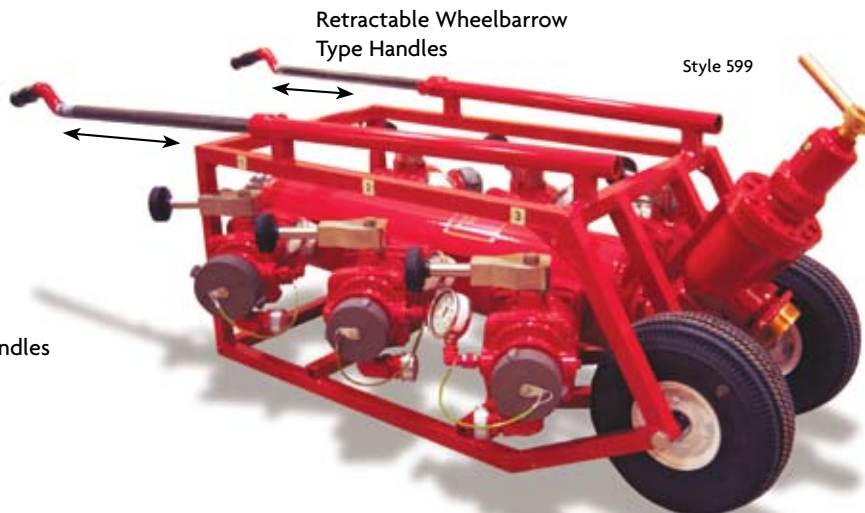

Style 599